



TP-ESMS-1H  
Front view

## OVERVIEW

### What can the TP-ESMS-1H Unit do for you?

TOPOINT TP-ESMS-1H is a totally standalone unit that comes with 1 digital input (D/I). Whenever the D/I has been triggered, the unit is able to send:

1. **Email notification**
2. **Short Message (SMS)**

The contents and recipients of Email notification and Short Message (SMS) can be pre-edited on the application software (as provided by TOPOINT CORP). No troublesome programming required, no SIM card is needed. No matter what happens in the distance where the TP-ESMS-1H has been installed, user is noted of what is going on in mere seconds.


**With TP\_ESMS\_1H board, you can easily design your own auto Email/ Short Message (SMS) sender.**

## FEATURES

- ⊕ One-piece design & Compact size (L7.5\*W6.3\*H2.2cm)
- ⊕ RJ45 connection speed: 10/100Mb
- ⊕ Totally standalone unit
- ⊕ Operates on voltage 5V DC
- ⊕ Visible event LED indicators
- ⊕ Easy and quick installation
- ⊕ No programming needed
- ⊕ No SIM card required
- ⊕ Bar of event reset




*TP-ESMS-1H comes in compact size—only in the half size of the palm*

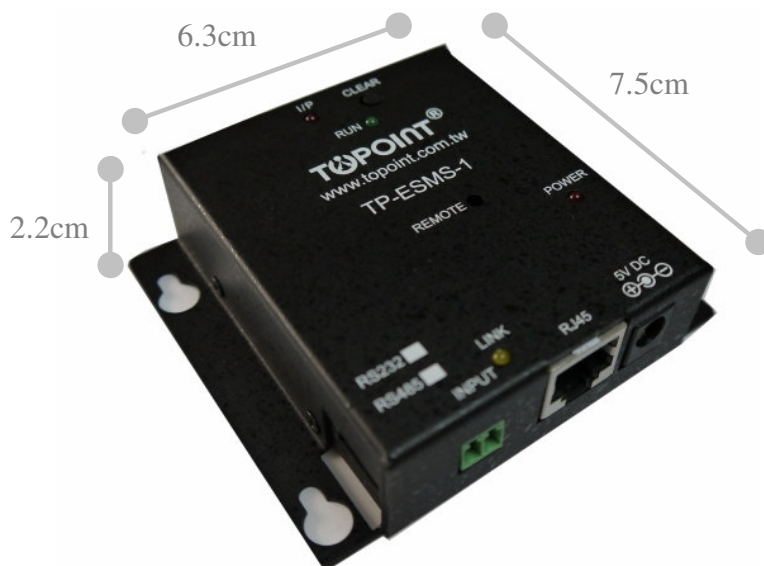

*TP-ESMS-1H unit dimension is stated in cm*

## BOARD LAYOUT

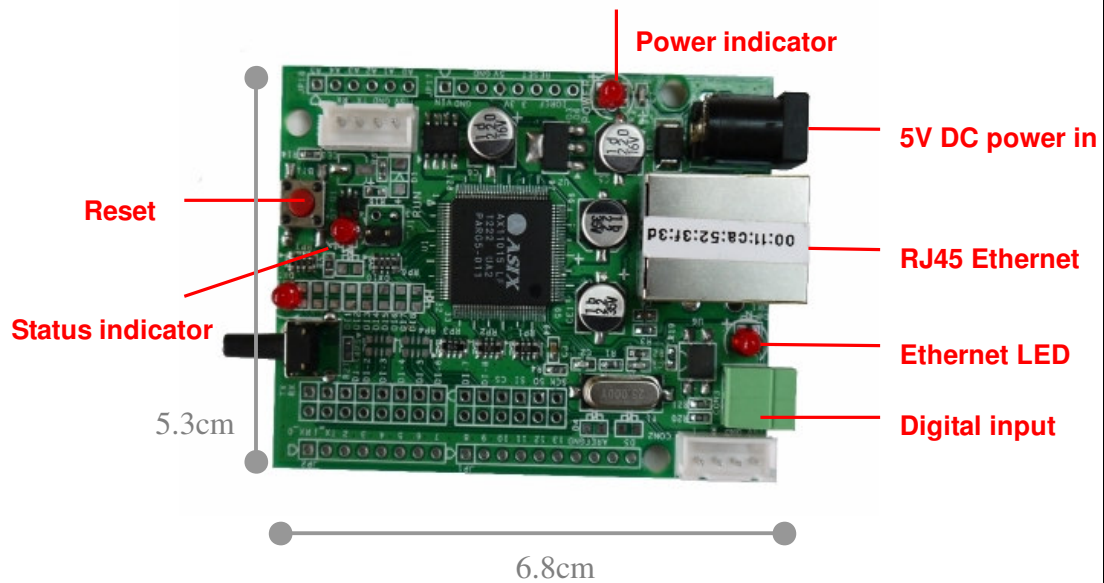

### Note

Reset	Press this button to clear event flashing
Status indicator	The indicator pulses regularly in the stand-by mode and turns into intense pulses during the short period of Email/SMS delivery mode
Power indicator	The indicator remains on when the unit is powered
Ethernet LED	The LED indicates the presence of Ethernet access. It turns into short intense flashes in an Email/SMS delivery mode.
Digital input (D/I)	This port connects with a sensor. The unit responds on triggered signals (N/C or N/O; dry contact)
5V DC power	The unit runs on a 5V DC power
Power consumption	250mA max (when in event delivery mode)
Board dimensions	7.5X6.3X2.2(cm; L/ W/ H)
Board weight	110g
Installation holes	4 holes with diameter of 0.7cm each

## CONFIGURATION

